


ALL PAGES OF THIS VERSION APPROVED

SIGNATURE:DATE:

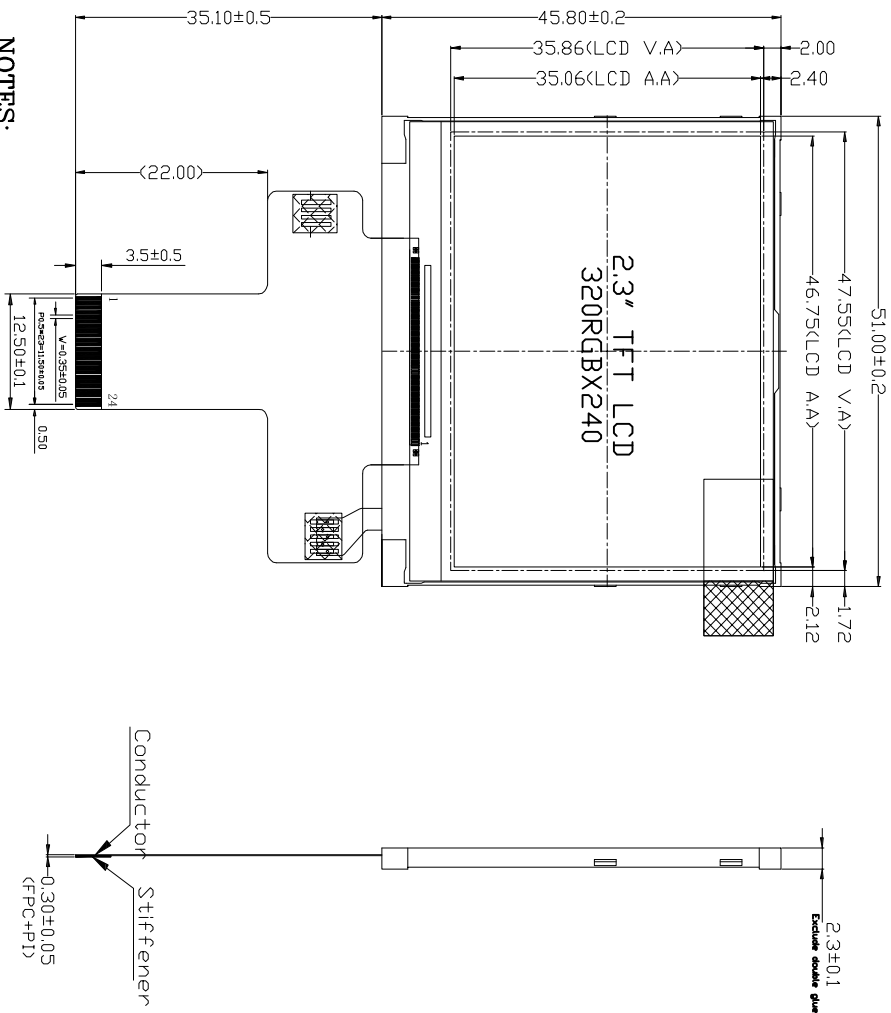

NOTES:

1. DISPLAY TYPE:

2. OPERATING TEMPERATURE:

3. STORAGE TEMPERATURE:

4. VIEWING ANGLE:

5. BACKLIGHT BRIGHTNESS:

6. DRIVER:

7. RESOLUTION:

8. CONNECTOR:

9. UNMARK TOLERANCES:
- 2.31" TFT_LCD/TRANSMISSIVE

-20°C~70°C

-30°C~80°C

6:00


260CD/M2

IL19342C


320(RGB)X240

FPC

±0.03MM

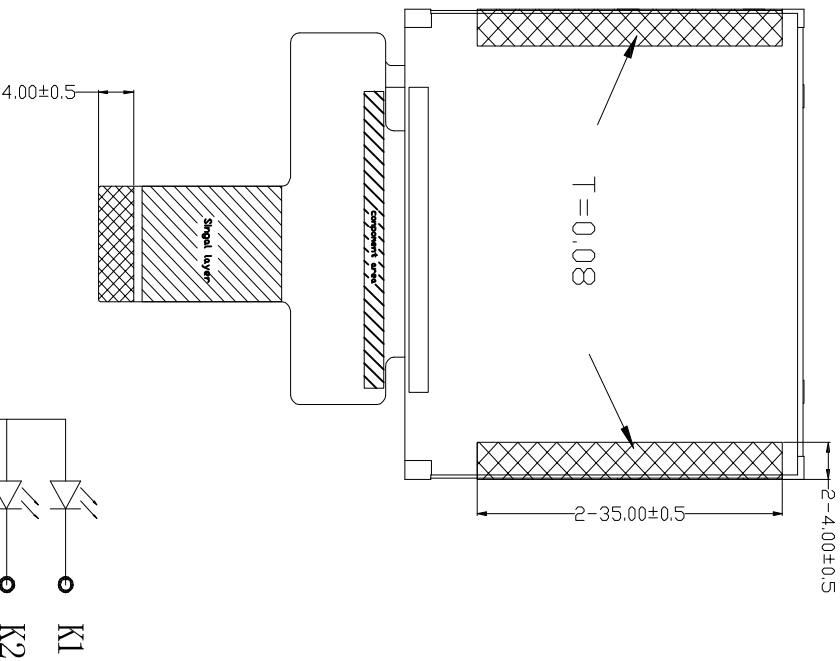

PIN	ASSIGNMENT
1	YU
2	XL
3	YD
4	XR
5	IM3
6	VCC
7	IMO
8	GND
9	/CS
10	RS_SCL
11	/WR_RS
12	/RD
13	SDA
14	DB0
15	DB1
16	DB2
17	DB3
18	DB4
19	DB5
20	DB6
21	DB7
22	/RESET
23	A
24	K

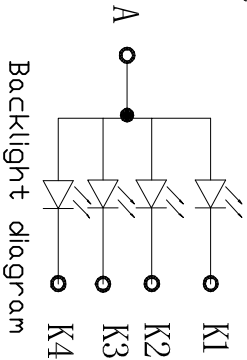

MACLIGHT DISPLAY CO., LIMITED

特殊工艺:

GENERAL TOL ALL UNITS 0.30 MM

DATE

MODEL NUMBER : MLT023R24-3

CHK:APPI

DD NOT SCALE THIS DRAWING.

PROJECTION

SHEET: 1 OF 1

DATE: