
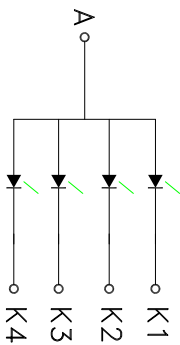
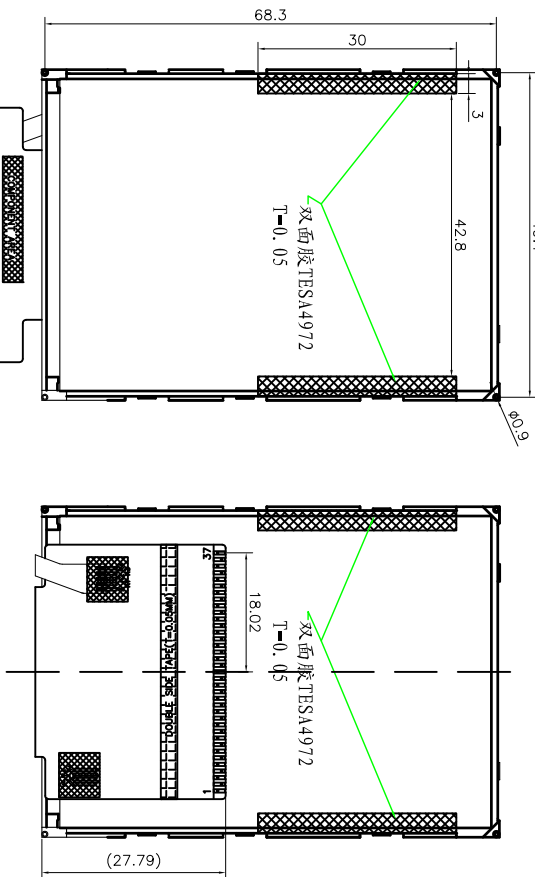
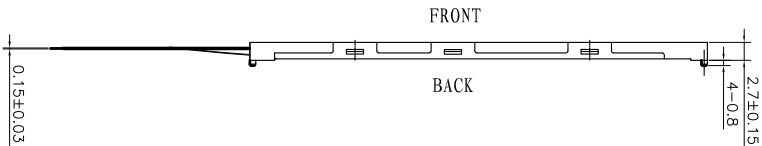


靠上居中组装

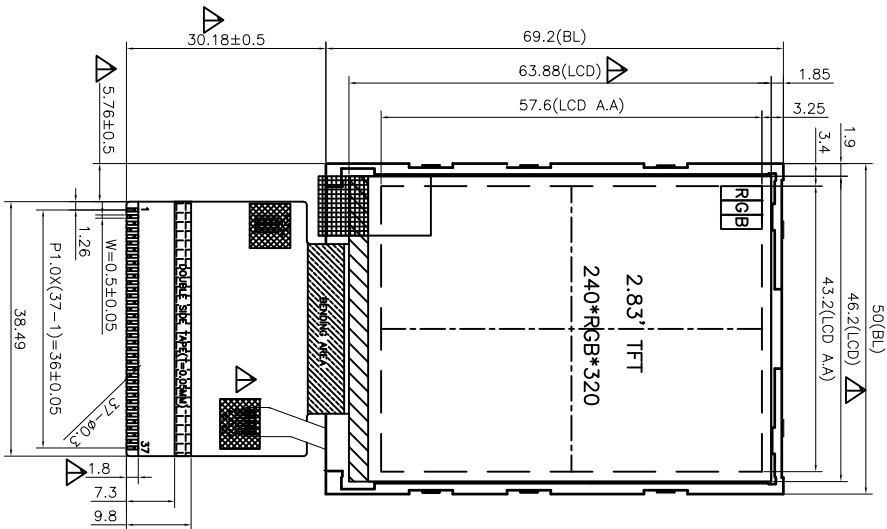

LED CIRCUIT

1	DB1
2	DB2
3	DB3
4	DB4
5	GND
6	VDD
7	CS
8	RS
9	WR
10	RD
11	NC
12	X+
13	Y+
14	X-
15	Y-
16	LEDA
17	LEDK1
18	LEDK2
19	LEDK3
20	LEDK4
21	NC
22	DB5
23	DB10
24	DB11
25	DB12
26	DB13
27	DB14
28	DB15
29	DB16
30	DB17
31	RESET
32	VDD
33	VDD
34	GND
35	DB6
36	DB7
37	DB8

NOTES:

1. DISPLAY TYPE : 2.83 TFT
2. POLARIZER MODE : TRANSMISSIVE/NEGATIVE
3. VIEWING DIRECTION: Free viewing direction
4. MAIN LCD BACKLIGHT : 1X4-CHIP WHITE LED PARALLEL
5. OPERATING TEMP : -20°C~70°C
6. STORAGE TEMP : -30°C~80°C
7. DRIVER IC : IL9341
8. LED OPERATING VOLTAGE : 3.2 V
- 9 . UNMARKED TOLERANCE : ±0.2

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.30	MM		MLT028Q37-15	
CHK:				DATE:
APP:			DO NOT SCALE THIS DRAWING.	PROJECTION

特殊工艺: