ALL PAGES OF THIS VERSION APPROVED			
SIGNATURE:		DATE:	

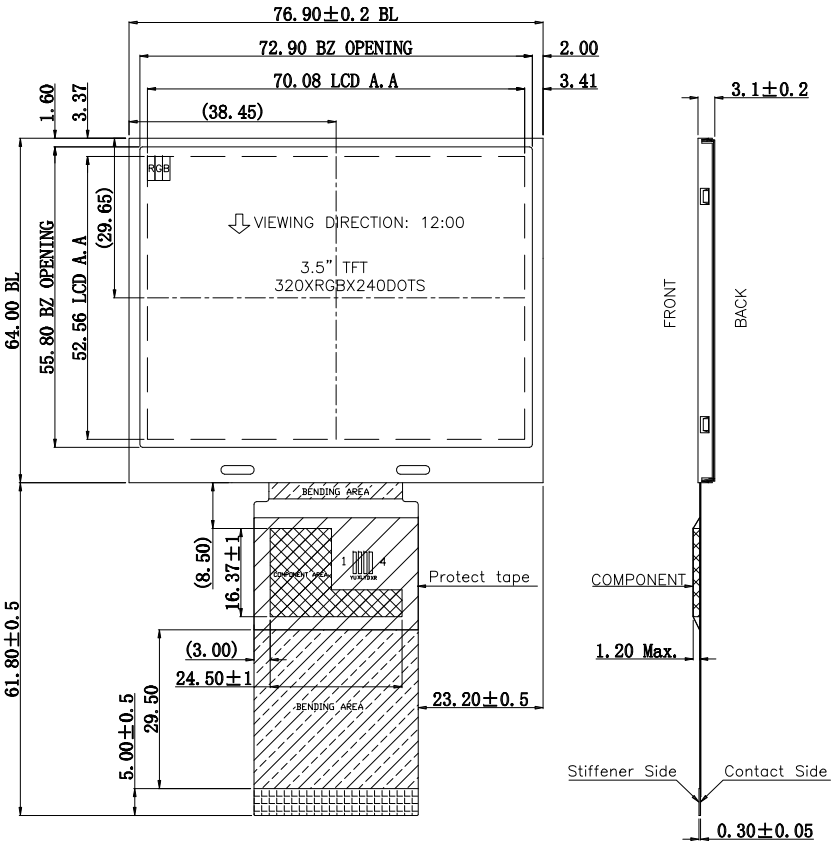

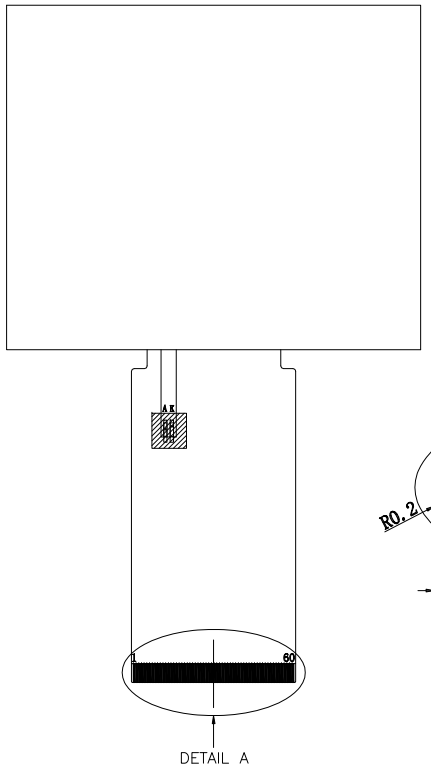

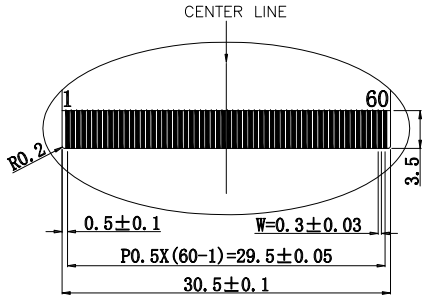

DETAIL A(2:1)

PIN FUNCTION	
PIN	SYMBOL
1	LED-K
2	LED-K
3	LED-A
4	LED-A
5	GND
6	XR
7	YD
8	XL
9	YU
10	GND
11	NC
12	NC
13	NC
14	RESET
15	CS
16	SCL
17	SDA-SDI
18	NC
19	NC
20	B0(D0)
21	B1(D1)
22	B2(D2)
23	B3(D3)
24	B4(D4)
25	B5(D5)
26	NC
27	NC
28	G0(D6)
29	G1(D7)
30	G2(D8)
31	G3(D9)
32	G4(D10)
33	G5(D11)
34	NC
35	NC
36	R0(D12)
37	R1(D13)
38	R2(D14)
39	R3(D15)
40	R4(D16)
41	R5(D17)
42	HSYNC
43	VSYNC
44	DCLK
45	AVDD
46	AVDD
47	VCC
48	VCC
49	DC/RS
50	RD
51	WR
52	PS0
53	PS1
54	PS2
55	PS3
56	WSYNC
57	NC
58	DE
59	GND
60	GND

NOTES:

1. DISPLAY TYPE: a-Si TFT
2. VIEWING DIRECTION: 12:00
3. POLARIZER MODE: TRANSMISSIVE/NW
4. LCD CONTROLLER: SSD2119
5. VDD: 3.3V
6. BACKLIGHT: 6 WHITE LEDs series (If=20mA, Vf=19.8V)
7. OPERATING TEMP.: -20°C-+70°C
8. STORAGE TEMP.: -30°C-+80°C
9. UNMARKED TOLERANCE: ±0.2
10. RoHS Compliance

CIRCUIT DIAGRAM:



特殊工艺:

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL 0.30	ALL UNITS: MM	DATE	MODEL NUMBER : MLT035Q60-3		SHEET: 1 OF 1
DWN:					DATE:
CHK:					
APP:			DO NOT SCALE THIS DRAWING.	PROJECTION	