



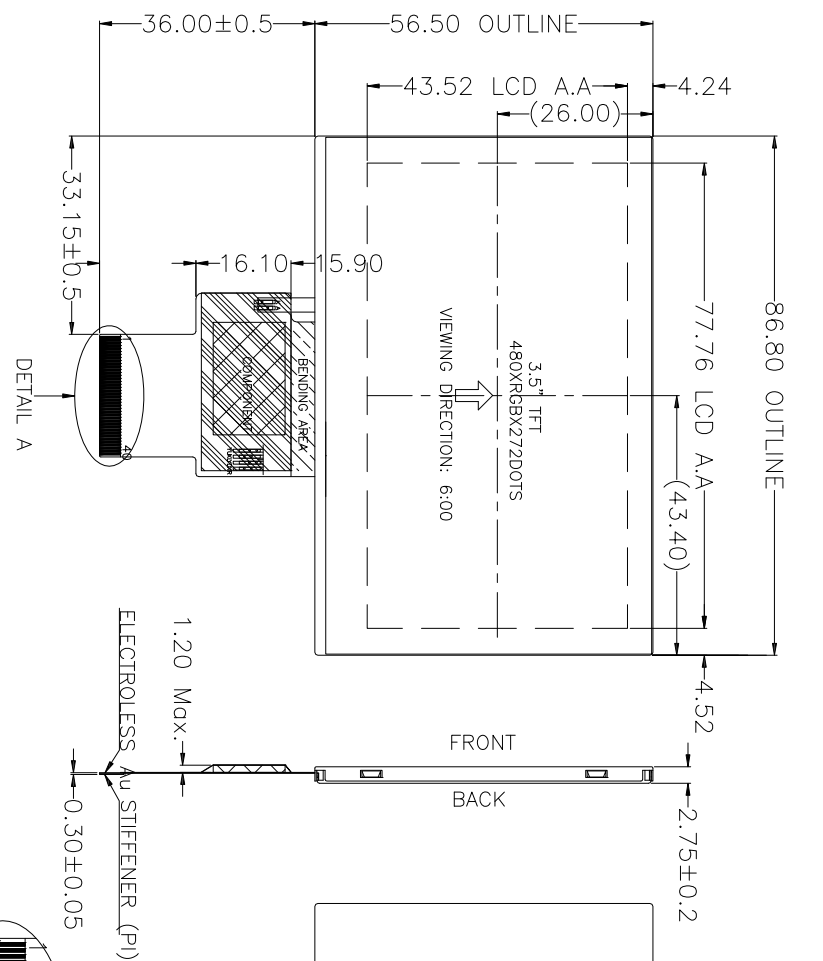

A—K

CIRCUIT DIAGRAM

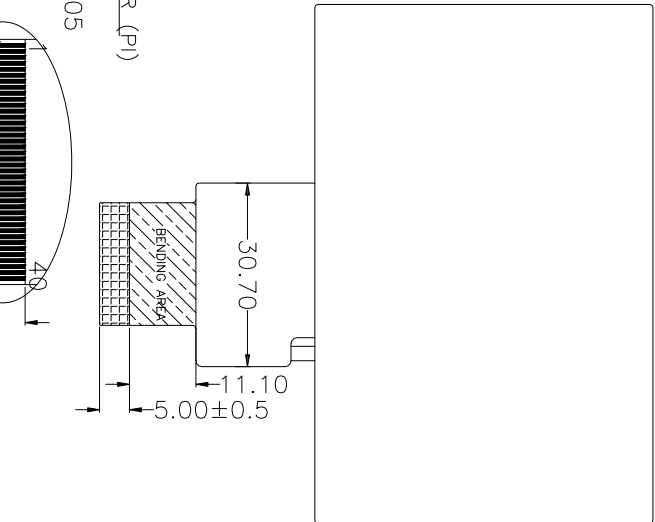

NO.	PIN NAME
1	LED-
2	LED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DECK
31	DISP
32	H SYNC
33	V SYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

- NOTES:
1. DISPLAY TYPE:

TFT
2. VIEWING DIRECTION:

6:00
3. POLARIZER MODE:

TRANSMISSIVE/POSITIVE
4. LCD CONTROLLER:

DTA5180A-C5
5. BACKLIGHT:

6 WHITE LED
6. OPERATING TEMP.:

-20°C-+70°C
7. STORAGE TEMP.:

-30°C-+80°C
8. UNMARKED TOLERANCE:

±0.2
9. REQUIREMENTS ON ENVIRONMENTAL PROTECTION:

RoHS