


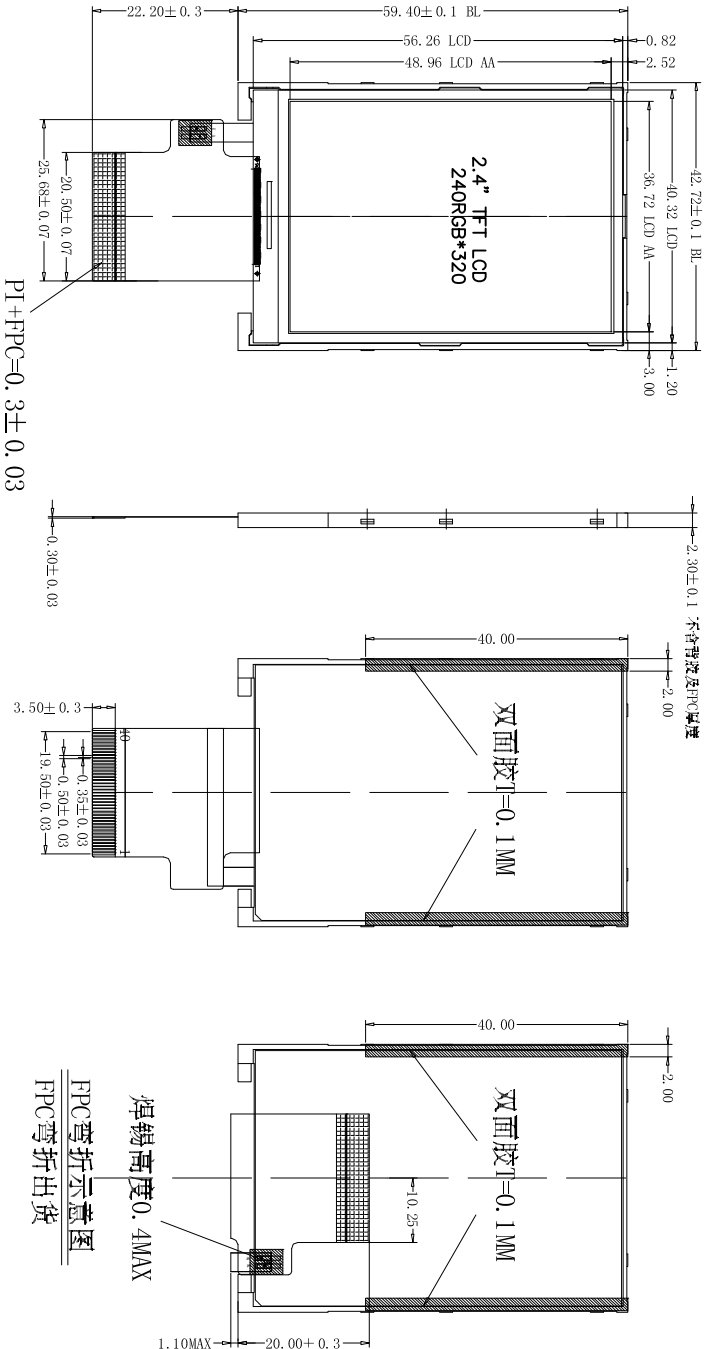

1	S01
2	S00
3	I00
4	I01
5	I02
6	I03
7	RESET
8	VS
9	HS
10	CLK
11	DE
12	DB17(R5)
13	DB16(R4)
14	DB15(R3)
15	DB14(R2)
16	DB13(R1)
17	DB12(R0)
18	DB11(G5)
19	DB10(G4)
20	DB9(G3)
21	DB8(G2)
22	DB7(G1)
23	DB6(G0)
24	DB5(B5)
25	DB4(B4)
26	DB3(B3)
27	DB2(B2)
28	DB1(B1)
29	DB0(B0)
30	R0X
31	WRX
32	D/CX
33	CSX
34	GND
35	VCC
36	IOWC
37	NC
38	NC
39	K
40	A

A=K

- NOTES:
1. DISPLAY TYPE: 2.4" TFT, TRANSMISSIVE
 2. OPERATING TEMPERATURE: -10°C ~ 60°C
 3. STORAGE TEMPERATURE: -20°C ~ 70°C
 4. DRIVE MODE: 1/320 DUTY
 5. DRIVER: ILI9341V
 6. RESOLUTION: 240(RGB) X 320
 7. CONNECTOR: FPC
 8. UNMARK TOLERANCES: ±0.03MM

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.30	MM		MLT024Q40-1 V2	
DWN:				
CHK:				
APP:			DO NOT SCALE THIS DRAWING.	DATE:
			PROJECTION	

特殊工艺: