
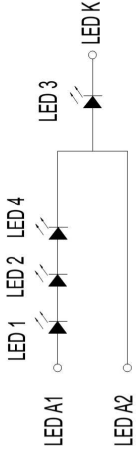
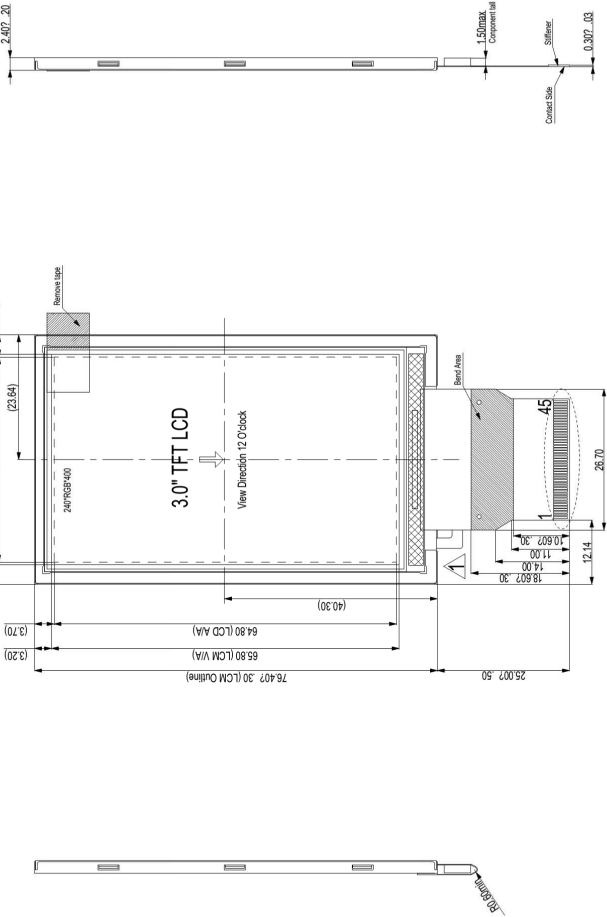


ALL PAGES OF THIS VERSION APPROVED	
SIGNATURE:	DATE:

NO.	Symbol
1	CPU
2	GND
3	RGB
4	GND
5	LED-K
6	LED-A2
7	LED-A1
8	GND
9	GND
10	/RESET
11	GND
12	R5
13	R4
14	R3
15	R2
16	R1
17	R0
18	G5
19	G4
20	G3
21	G2
22	G1
23	G0
24	B5
25	B4
26	B3
27	B2
28	B1
29	B0
30	SDI
31	Open
32	SDO
33	RD
34	WR
35	RS
36	SCL
37	CS
38	GND
39	ENABLE
40	GND
41	HSYNC
42	GND
43	DOTCLK
44	TE
45	VCCIO
	VCC
	IM0/ID
	IM1
	IM2
	GND
	GND

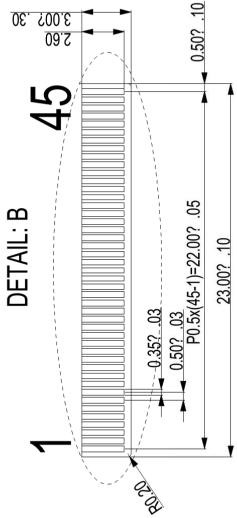

BLU circuit

- NOTES:
1. DISPLAY TYPE: 3.0" TFT_LCD /TRANFLECTIVE
 2. LCD OPERATING VOLTAGE: 2.8V
 3. OPERATING TEMPERATURE: -20°C~70°C
 4. STORAGE TEMPERATURE: -30°C~80°C
 5. VIEWING ANGLE: 12:00
 6. BACKLIGHT BRIGHTNESS: 130CD/M2
 7. DRIVER: HX8352B
 8. RESOLUTION: 240(RGB)X400
 9. CONNECTOR: FPC
 10. UNMARK TOLERANCES: ±0.03MM

特殊工艺:

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOTAL	UNITS	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.30	MM		ML T030Q45-R1	
DWN:				
CHK:				DATE:
APP:			DO NOT SCALE THIS DRAWING.	PROJECTION