



ALL PAGES OF THIS VERSION APPROVED

SIGNATURE:DATE:


Rev.

Description.

Date

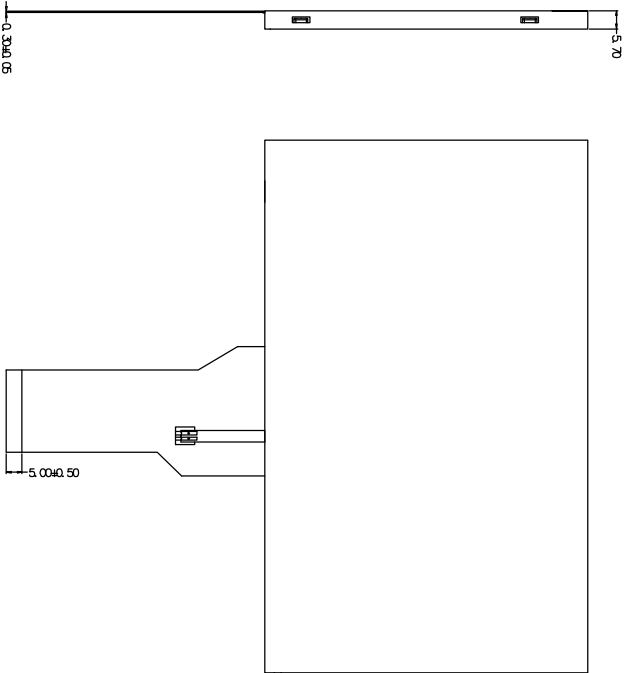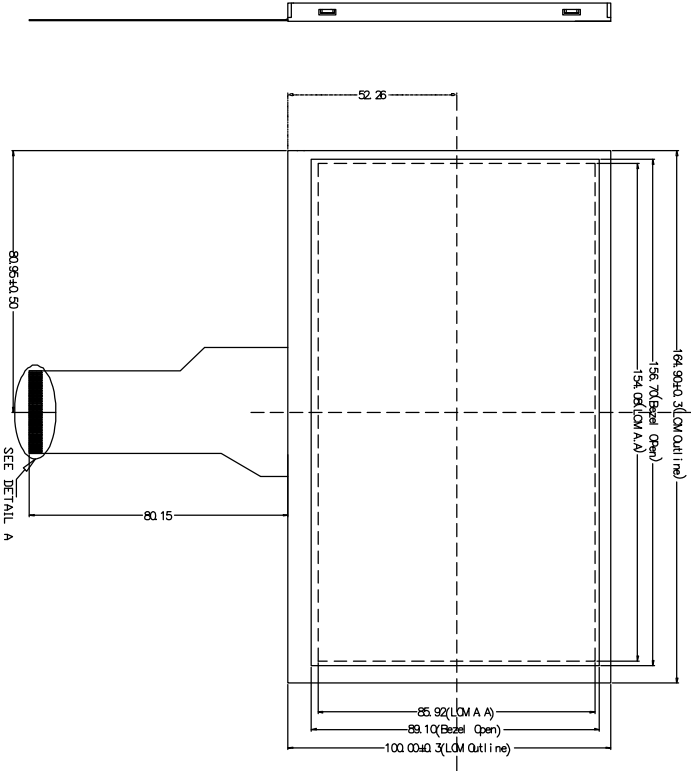

1	VLED+
2	VLED+
3	VLED-
4	VLED-
5	GND
6	VCOM
7	VDD/D
8	MODE
9	DE
10	V/S
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	LR
40	UD
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

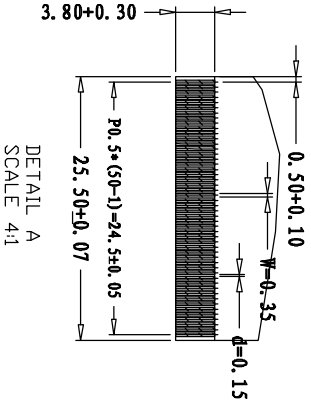

NOTES:

1. DISPLAY TYPE: 7.0" TFT_LCD / TRANSMISSIVE
2. OPERATING TEMPERATURE: -20°C~70°C
3. STORAGE TEMPERATURE: -30°C~80°C
4. VIEWING ANGLE: 6:00
5. BACKLIGHT BRIGHTNESS: 1000CD/M2
6. RESOLUTION: 800(RGB)X480
7. CONNECTOR: FPC
8. UNMARK TOLERANCES: ±0.03MM

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL: ALL UNITS: 0.30 MM	DATE	MODEL NUMBER: MLT070W50-6	SHEET: 1 OF 1
DWN:			
CHK:			
APP:		DD NOT SCALE THIS DRAWING.	DATE:
PROJECTION			