

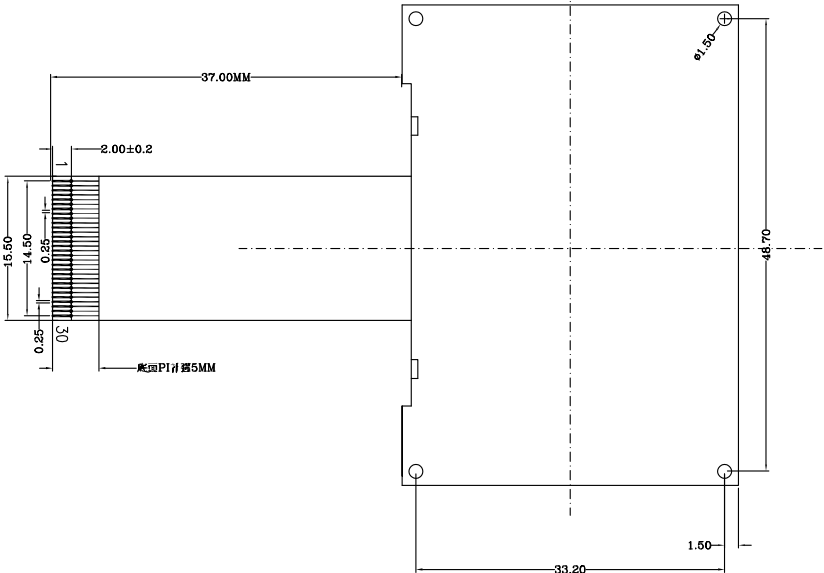


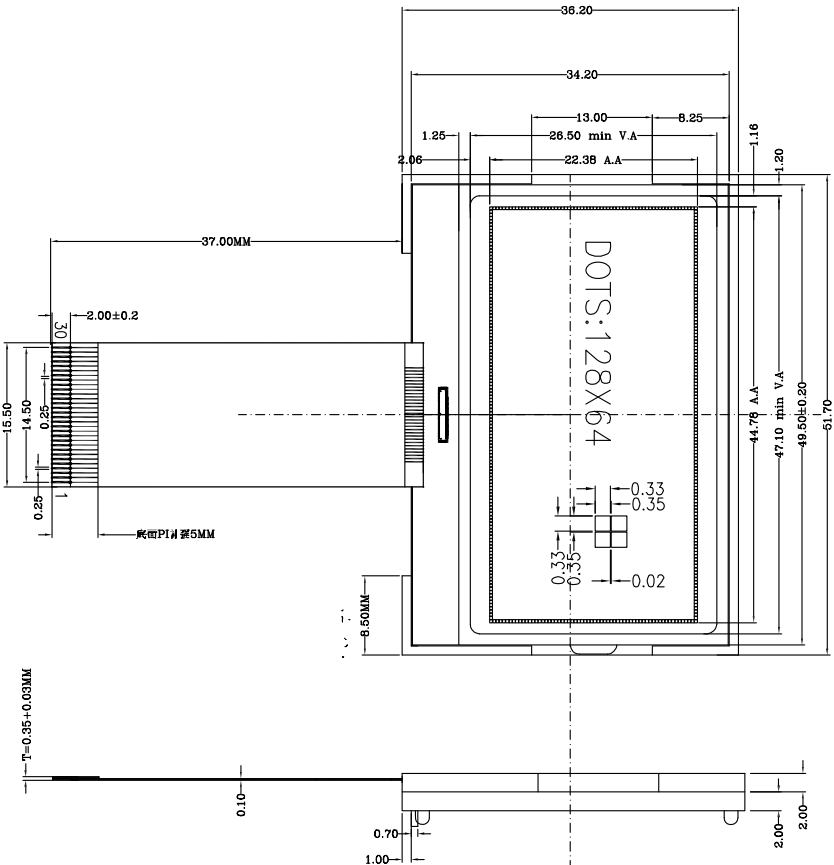

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	CS1B	RST	A0	WR	RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VDD
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
VSS	NOUT	DA3+CAP1	-CAP1+CAP2	+CAP2	-CAP2	V4	V3	V2	V1	V0	C86	PSB	K	

DISPLAY TYPE: STN
POLARIZER: TRANSPARENT
VIEWING DIRECTION: 6:00-CLOCK
DRIVE METHOD: 1/64DUTY,1/9BIAS
OPERATING VOLTAGE: 3.0V
OPERATING TEMP: -20 TO +70 Deg.C
STORAGE TEMP: -30 TO +80 Deg.C
UNDESIGNED TOLERANCE: ±0.20
CONTROLLER: ST7565R
LED BACKLIGHT: WHITE
LED BACKLIGHT OPERATING VOLTAGE: 3.0V
LED BACKLIGHT OPERATING ELECTRIC CURRENT: ≤30MA

CIRCUIT DIAGRAM(LED*2=2dies)



MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.30	MM		MLG12864J-7	
DWN:				
CHK:				
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION	DATE:

特殊工艺: