



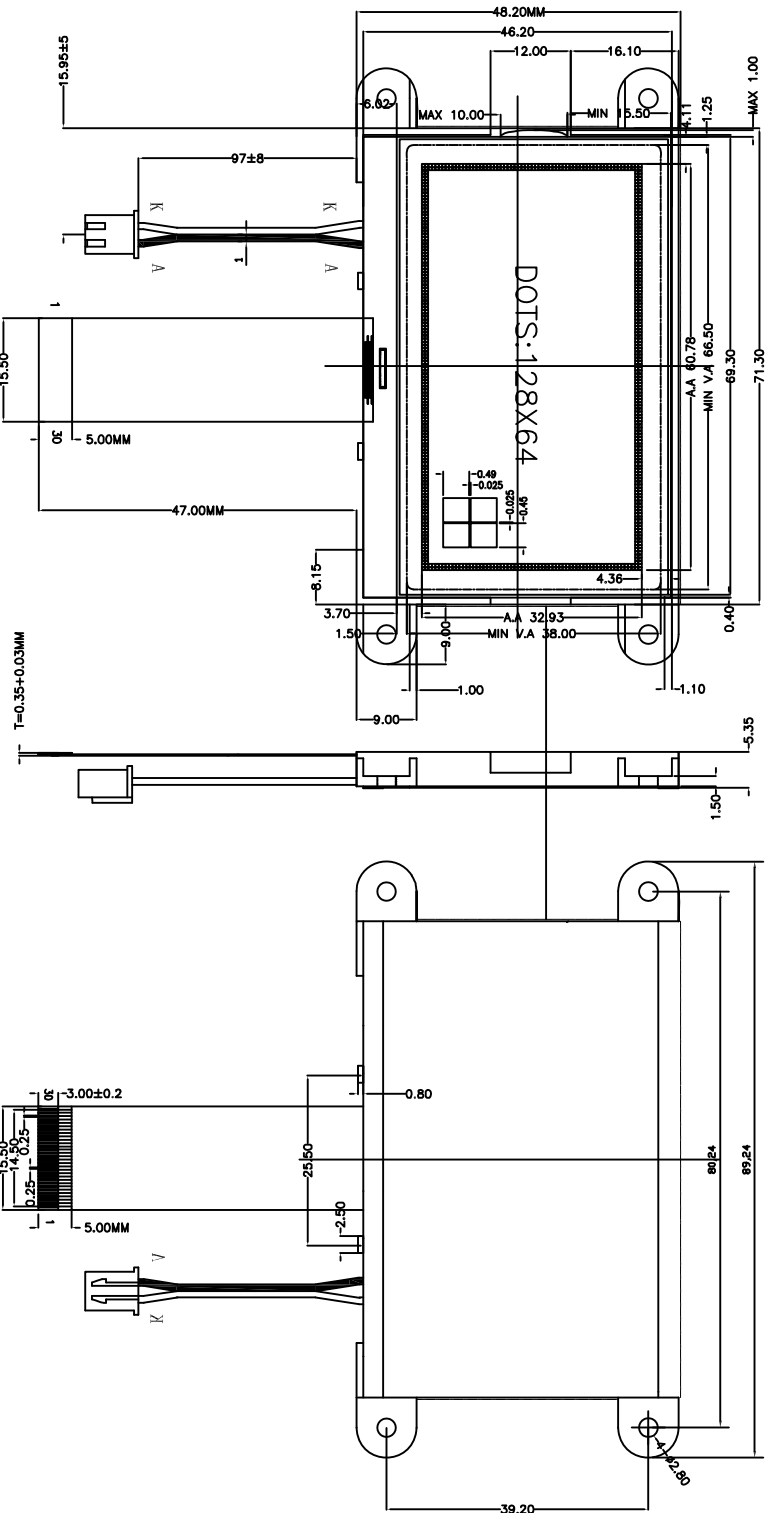

NOTES:

1. DISPLAY TYPE: FSTN, TRANSFLECTIVE
2. OPERATING TEMPERATURE: -20°C~70°C
3. STORAGE TEMPERATURE: -30°C~80°C
4. VIEWING ANGLE: 6:00
5. OPERATING VOLTAGE: 3.0V
6. DRIVER: ST7565R
7. DRIVER METHOD: 1/64DUTY, 1/9BIAS
8. CONNECTOR: COG+PIN
9. UNMARK TOLERANCES: ±0.03MM



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
IRS	HPM	PSB	CSB	V0	V1	V2	V3	V4	P2-	P2+	P1+	P1-	P3+	WOUT
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
VSS	VDD	D7	D6	D5	D4	D3	D2	D1	D0	RD	WR	AO	RST	CS

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.30	MM		MLG12864J-9	
DWN:				
CHK:				
APP:			DO NOT SCALE THIS DRAWING.	DATE:
			PROJECTION	

特殊工艺: