
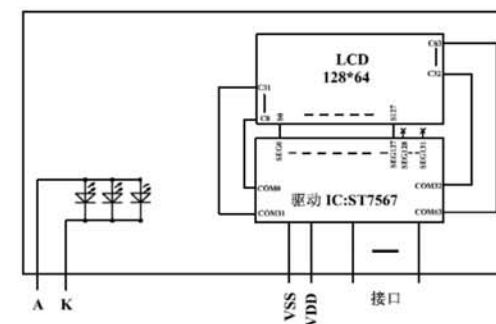
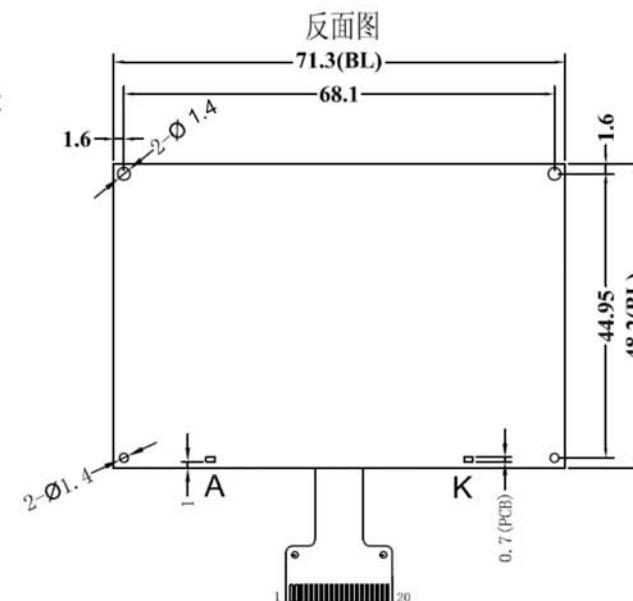


1	CS
2	RST
3	RS(A0)
4	WR(R/W)
5	RD(E)
6-13	D0-D7
14	VDD
15	VSS
16	V0
17	XV0
18	VG
19	C86
20	PS

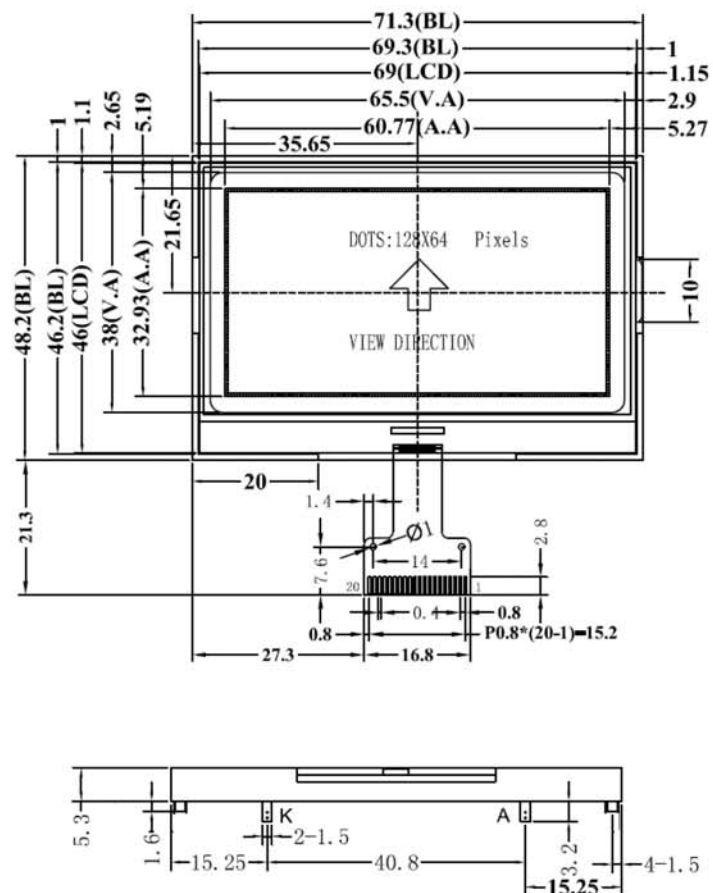


NOTES:

- | | |
|---------------------------|-----------------------|
| 1. DISPLAY TYPE: | STN |
| 2. OPERATING TEMPERATURE: | -20°C~70°C |
| 3. STORAGE TEMPERATURE: | -30°C~80°C |
| 4. VIEWING ANGLE: | 6:00 |
| 5. BACKLIGHT: | 4 WHITE LED 3.0V 60MA |
| 6. DRIVER: | ST7567 |
| 7. RESOLUTION: | 128X64 |
| 8. CONNECTOR: | FPC |
| 9. UNMARK TOLERANCES: | ±0.03MM |

特殊工艺:


MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL 0.30	ALL UNITS: MM	DATE	MODEL NUMBER : MLG12864J-28		SHEET: 1 OF 1
DWN:					DATE:
CHK:					
APP:			DO NOT SCALE THIS DRAWING.	PROJECTION	