
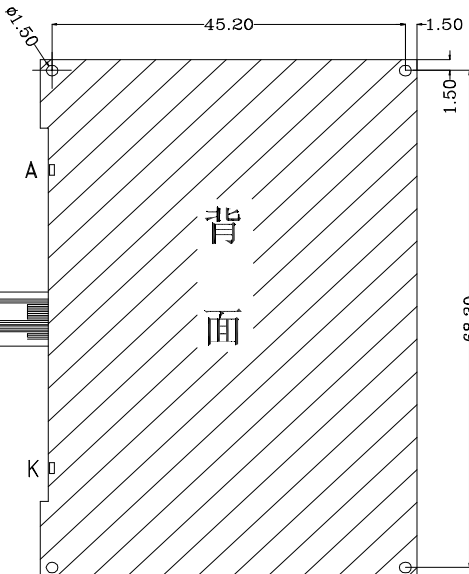


- 1.DISPLAY TYPE: FSTN/NEGATIVE
- 2.POLARIZER: TRANSPARENT
- 3.VIEWING DIRECTION: 6:00-CLOCK
- 4.DRIVE METHOD: 1/64DUTY,1/9BIAS
- 5.OPERATING VOLTAGE: 3.0V
- 6.OPERATING TEMP: -20°C TO 70 °C
- 7.STORAGE TEMP: -30°C TO 80 °C
- 8.DRIVE: ST7565R
- 9.UNSIGNED TOLERANCE: ±0.20
- 10.LED BACKLIGHT: WHITE
- 11.LED BACKLIGHT OPERATING VOLTA
- 12.LED BACKLIGHT OPERATING ELECT

CIRCUIT DIAGRAM(LED1*3=3dies)



1	2	3	4	5	6	7	8	9	10
CS	RES	A0	D6	D7	VDD	VSS	V0	XV0	VG

PIN NO.

(b) MACLIGHT DISPLAY CO., LIMITED

GENERAL TOTAL UNITS: 0.30	MM	DATE	MODEL NUMBER :		SHEET: 1 OF 1
DWN:			MLG12864JW-35N		DATE:
CHK:					
APP:			DO NOT SCALE THIS DRAWING.		

特殊工艺: