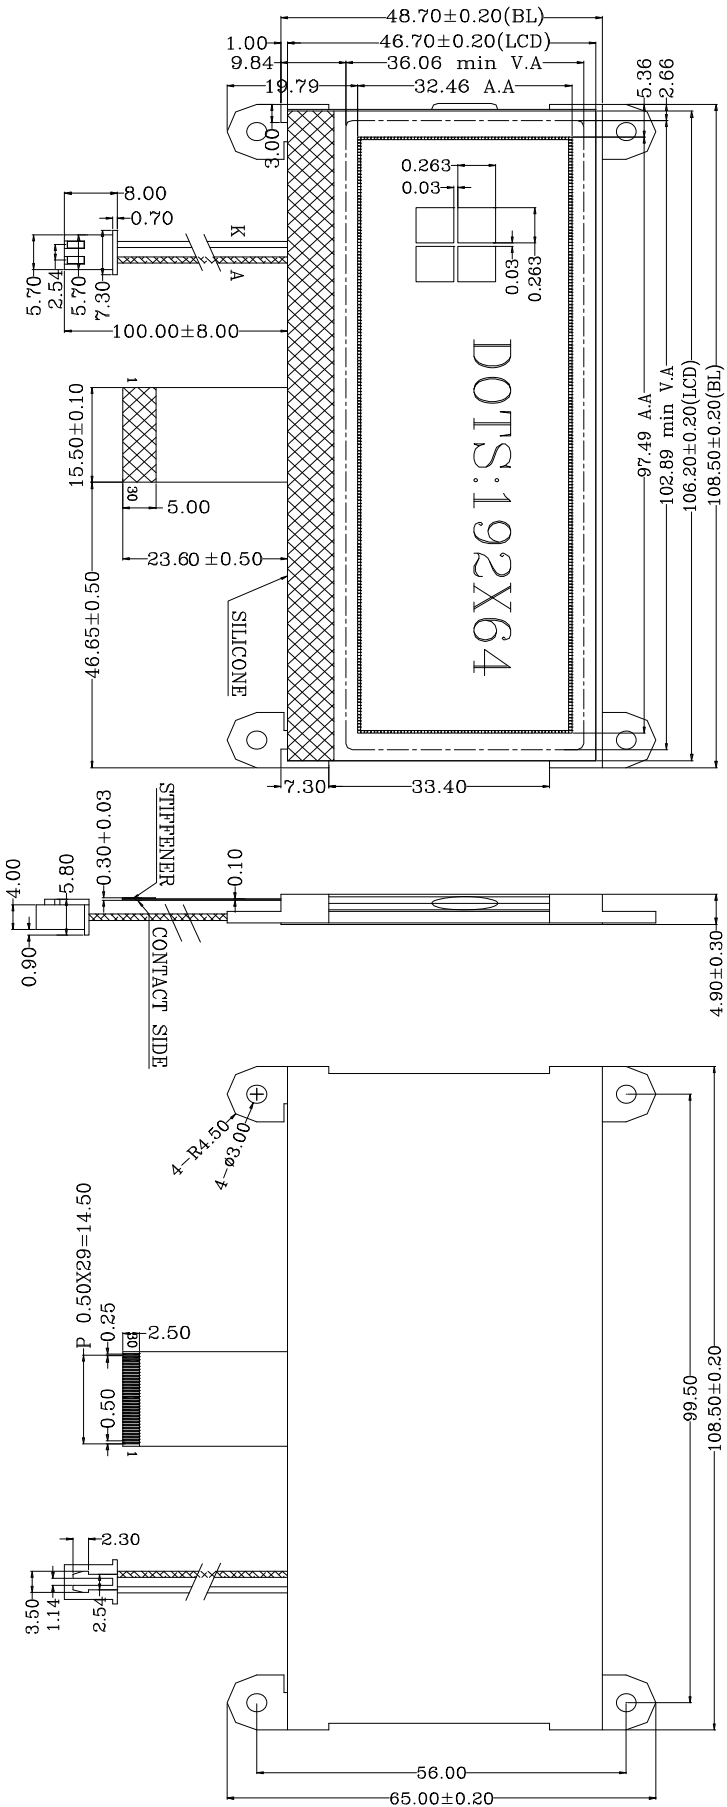


PIN NO.		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
SYMBOL		HPMB	C36	V4	V3	V2	V1	V0	C2-	C2+	C1+	C1-	C3+	VPP	VOU	VD2
PIN		16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
SYMBOL		PS	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	RDB	WRB	AO	RRES	CS1B	VSS

- NOTES:
1. DISPLAY TYPE:

FSTN/NEGATIVE, TRANSMISSIVE
2. OPERATING TEMPERATURE:

-20°C~70°C
3. STORAGE TEMPERATURE:

-30°C~80°C
4. VIEWING ANGLE:

6:00
5. OPERATING VOLTAGE:

3.0V
6. DRIVER:

IST3020
7. BACKLIGHT CURRENT:

90MA(MAX)
8. DRIVE METHOD:

1/64DUTY, 1/9BIAS
9. UNMARK TOLERANCES:

±0.03MM

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.30	MM		MLG19264JW-2N	
DWN:				
CHK:				
APP:			DO NOT SCALE THIS DRAWING.	DATE:
			PROJECTION	

特殊工艺: