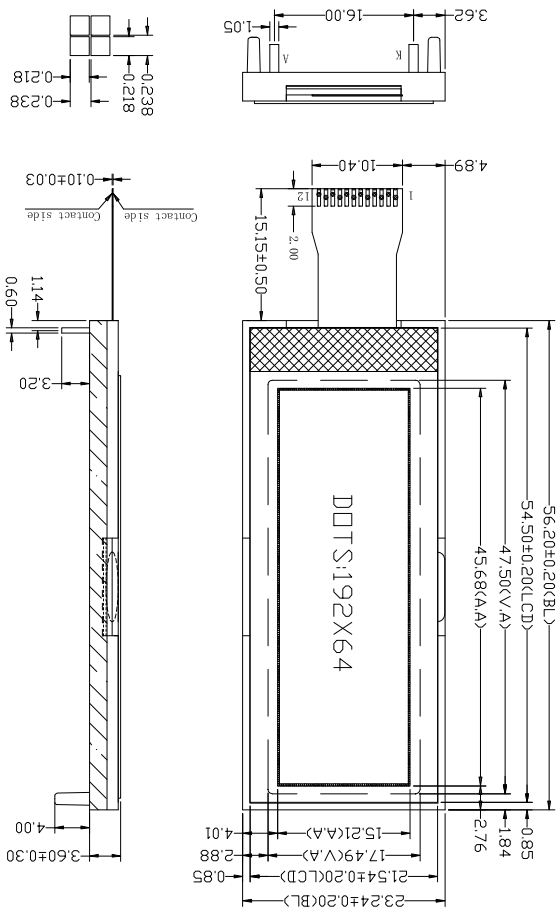


NOTES:

1. DISPLAY TYPE: FSTN/POSITIVE

2. OPERATING TEMPERATURE: $-20^{\circ}C \sim 70^{\circ}C$

3. STORAGE TEMPERATURE: $-30^{\circ}C \sim 80^{\circ}C$

4. POLARIZER: TRANSFLECTIVE

5. DRIVE METHOD: 1/65DUTY,1/9BIAS

6. DRIVER: UC1604C


7. OPERATING VOLTAGE: 3.0V/3.3V

8. BACKLIGHT: WHITE

9. UNMARK TOLERANCES: $\pm 0.03MM$

PIN	DESC
1	VLCD
2	VB1+
3	VB1-
4	VB0+
5	VB0-
6	VSS
7	VDD
8	SDA
9	SCK
10	CD
11	RSTB
12	CS0

 MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS	DATE	MODEL NUMBER :		SHEET: 1 OF 1
0.30	MM		MLG19264JW-10		
DWN:					
CHK:				PROJECTION	DATE:
APP:			DO NOT SCALE THIS DRAWING.		

特殊工艺: