



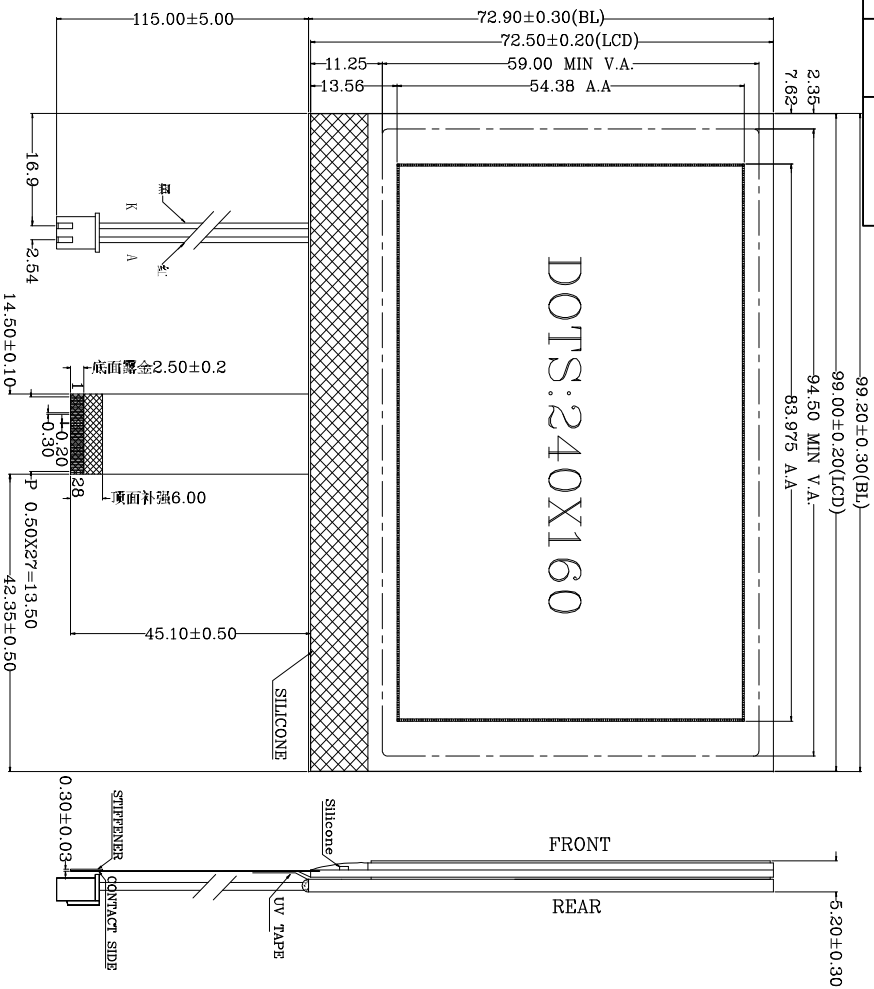

PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	NC	15	CS0
2	VLCD	16	A0
3	VS+	17	WR1
4	VS-	18	WR0
5	VB0-	19	RST
6	VB1-	20	D0
7	VB1+	21	D1
8	VB0+	22	D2
9	VDD23	23	D3
10	VDD	24	D4
11	VSS	25	D5
12	BM1	26	D6
13	BMO	27	D7
14	CS1	28	NC

CIRCUIT DIAGRAM(LED+resistors)

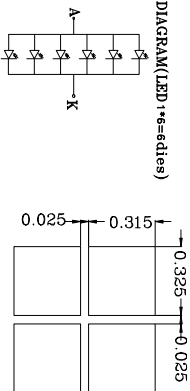

NOTES:

1. DISPLAY TYPE:

FSTN/POSITIVE,TRANSFLECTIVE
2. OPERATING TEMPERATURE:

-20°C~70°C
3. STORAGE TEMPERATURE:

-30°C~80°C
4. VIEWING ANGLE:

6:00
5. OPERATING VOLTAGE:

3.0V/3.3V
6. DRIVER:

UC1698
7. BACKLIGHT CURRENT:

90MA(MAX)
8. LED OPERATING VOLTAGE:

3.0V
9. DRIVE METHOD:

1/160DUTY,1/10BIAS
10. UNMARK TOLERANCES:

±0.03MM

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.30	MM		MLG240160JW-5	
CHK:				
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION	DATE:

特殊工艺: