






Notes:

1. Color: White/Blue/Yellow
2. Driver IC: SSD1309
3. FPC Number: UT-0205-P05
4. Interface:
8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
5. General Tolerance: ± 0.30
6. The total thickness (1.55 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 1.80 Max.

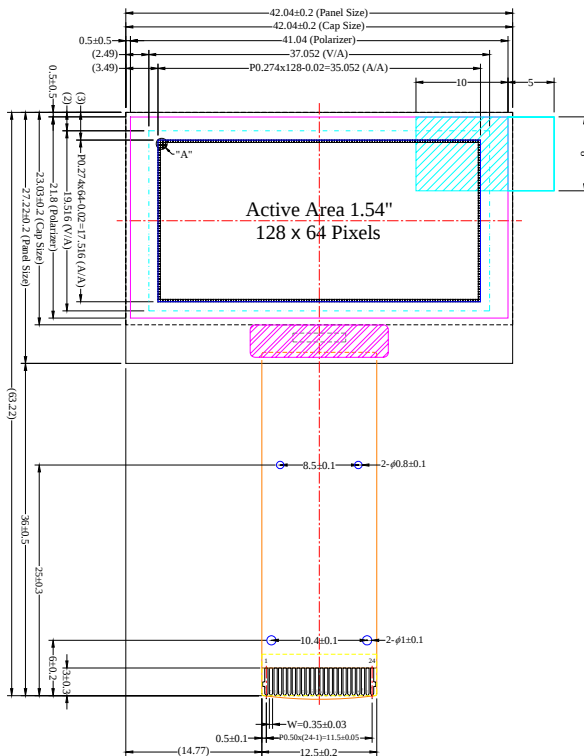

CONFIDENTIAL

Item	Date	Remark
A	20111026	Original Drawing



Pin	Symbol
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D#
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCL
24	N.C. (GND)

Unless Otherwise Specified		Title				Material		
Unit	mm	MLD154-12864A Folding Type OEL Display Module				Soda Lime / Polyimide		
General Roughness		Pixel Number: 128 x 64, Monochrome, COG Package						
Tolerance		Drawn	E.E.	Panel / E.	P.M.			
Dimension	± 0.3	By	Dora Yang	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	Scale	Sheet
Angle	± 1	Date	20111026	20111026	20111026	20111026	1:1	1 of 1
								A3