



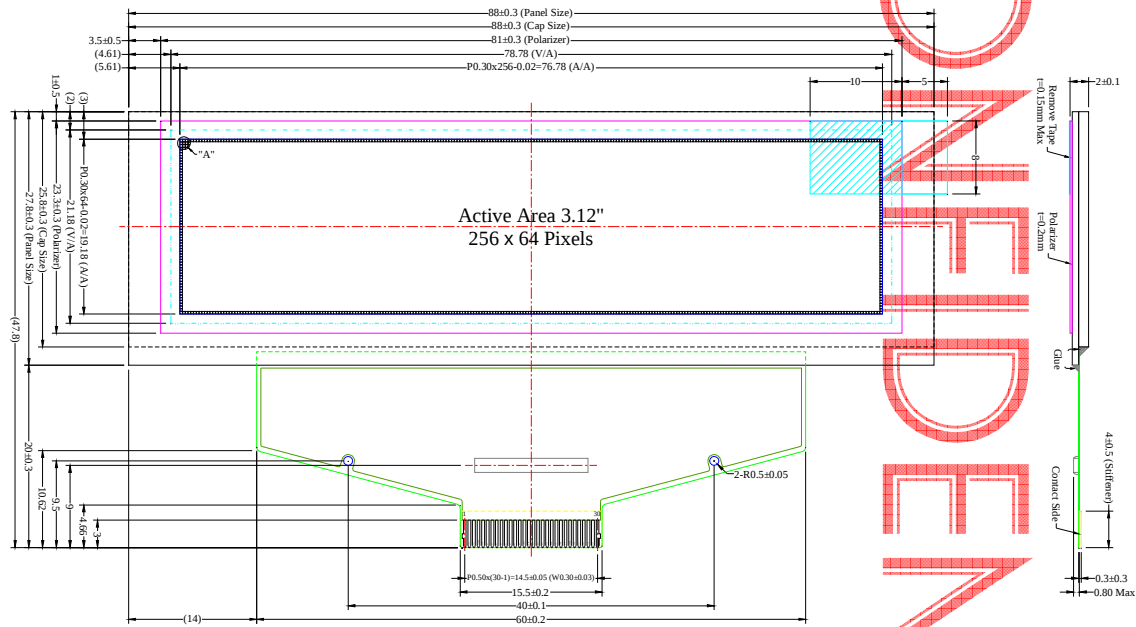


Notes:

1. Color: White/Blue/Yellow/Green
2. Driver IC: SSD1322
3. Die Size: 12374um x 1526um
4. COF Number: SSD1322U
5. Interface:
8-bit 68XX/80XX Parallel, 3-/4-wire SPI
6. General Tolerance: ±0.30
7. The total thickness (2.10 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 2.35 Max.

Item	Date	Remark
A	20080825	Original Drawing
B	20091224	Modify Column256 define



Pin	Symbol
1	N.C. (GND)
2	VSS
3	VCC
4	VCOMH
5	V1SS
6	D7
7	D6
8	D5
9	D4
10	D3
11	D2
12	D1
13	D0
14	E/RD#
15	R/W#
16	BS0
17	BS1
18	DC#
19	CS#
20	RES#
21	FR
22	IREF
23	N.C.
24	VDDIO
25	VDD
26	VCI
27	VSL
28	V1SS
29	VCC
30	N.C. (GND)



Unless Otherwise Specified			MLD312-25664A Folding Type OEL Display Module Pixel Number: 256 x 64, Monochrome, COF Package				Material		
Unit	mm	Title					Soda Lime / Polyimide		
General Roughness									
Tolerance		Drawn	E.E.	Panel / E.	P.M.				
Dimension	+0.30	By	Gary Lin	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	Scale	Sheet	Size
Angle	±1	Date	20091224	20091224	20091224	20091224	1:1	1 of 1	A3