


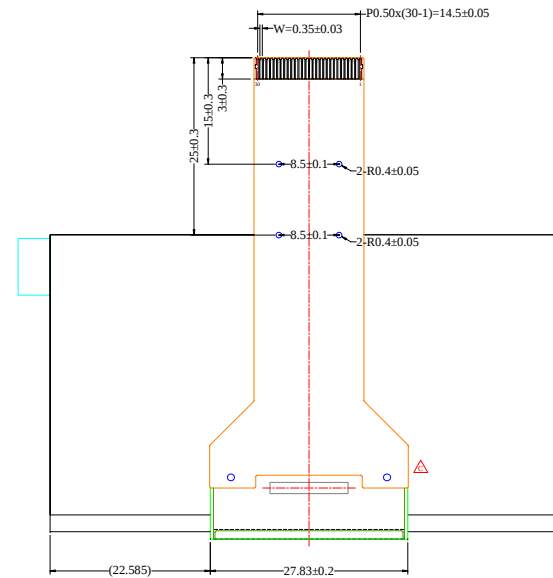


Item	Date	Remark
A	20071210	Original Drawing
B	20081225	Modify FPC Attached Position
C	20090401	Modify FPC Profile

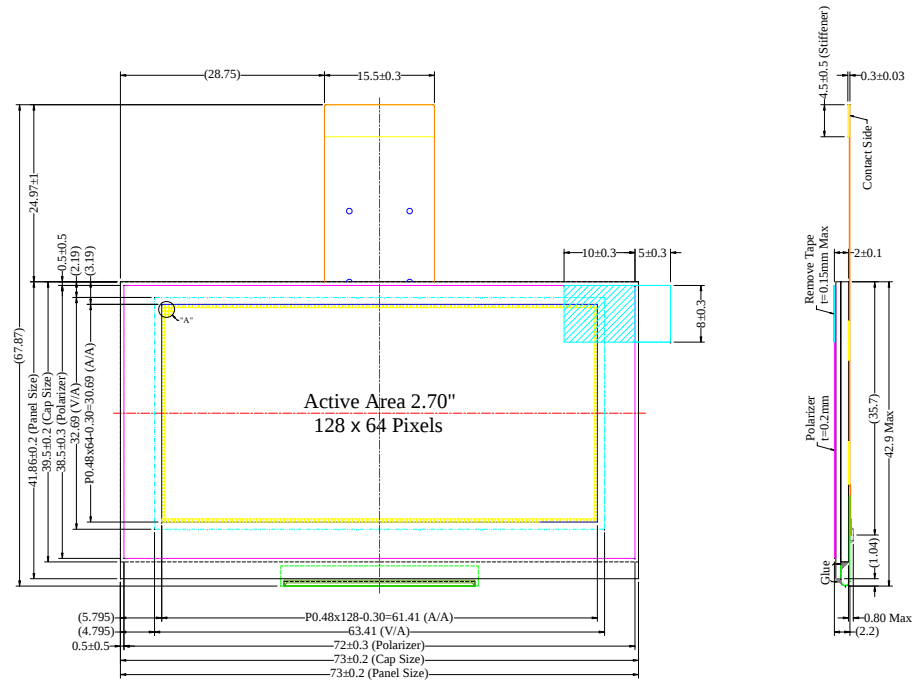

Pin	Symbol
1	N.C. (GND)
2	VCC
3	VCOMH
4	IREF
5	D7
6	D6
7	D5
8	D4
9	D3
10	D2
11	D1
12	D0
13	E/RD#
14	R/W#
15	D/C#
16	RES#
17	CS#
18	N.C.
19	BS2
20	BS1
21	VDD
22	N.C.
23	N.C.
24	VBREF
25	RESE
26	FB
27	VDDDB
28	GDR
29	VSS
30	VSL



Notes:

- Color: Yellow (16 Gray Scales)
- Driver IC: SSD1325
- TCP Number: SSD1325T2 / SSD1325T6
FPC Number: UT-0225-P04
- Interface:
8-bit 68XX/80XX Parallel, 4-wire SPI
- General Tolerance: ± 0.30
- The total thickness (2.10 Max) is without polarizer protective film, remove tape & driver IC.
The actual assembled total thickness with above materials should be 3.15 Max.

Unless Otherwise Specified		Title	MLD270-12864D Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, TCP+FPC Package				Material		
Unit	mm						Soda Lime / Polyimide		
General Roughness									
Tolerance			Drawn	E.E.	Panel / E.	P.M.			
Dimension	± 0.3	By	Humphrey Lin	Ting-Kuo Hu	Ivy Lo	Cherry Lin	Scale	Sheet	Size
Angle	± 1	Date	20090401	20090401	20090401	20090401	1:1	1 of 1	A3