

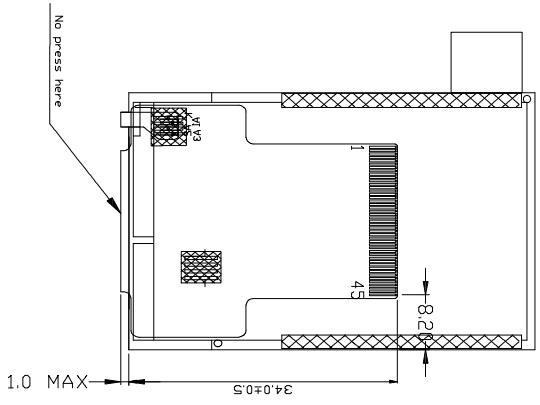
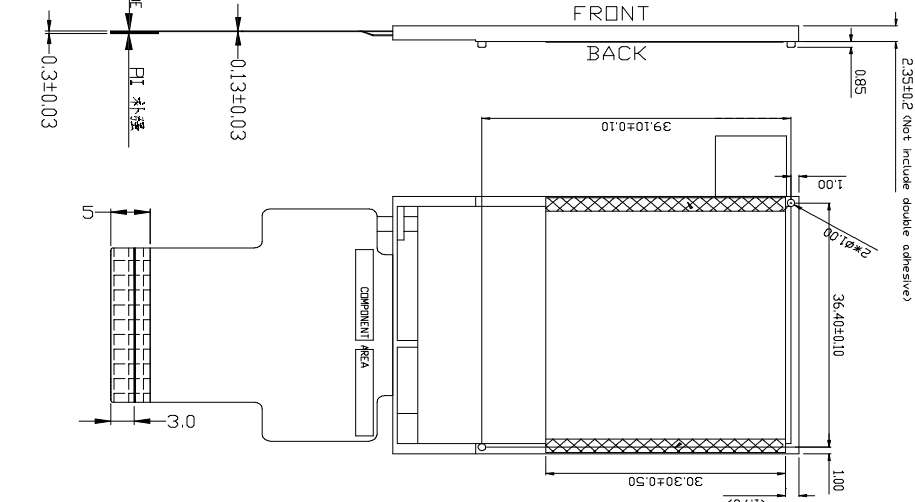


ALL PAGES OF THIS VERSION APPROVED
SIGNATURE: DATE:

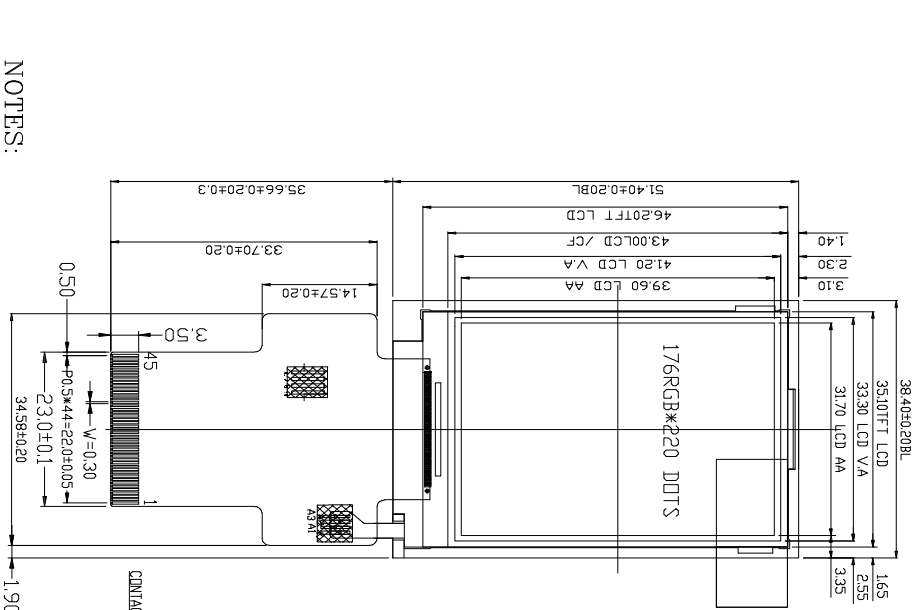

Pin	Name
1	GND
2	VCC
3	VCCID
4	RS
5	CS
6	VSYNC
7	HSYNC
8	DOTCLK
9	DEN
10	RESET
11	SDI
12	RD
13	WR
14	DB17
15	DB16
16	DB15
17	DB14
18	DB13
19	DB12
20	DB11
21	DB10
22	DB9
23	DB8
24	DB7
25	DB6
26	DB5
27	DB4
28	DB3
29	DB2
30	DB1
31	DB0
32	IM3
33	IM2
34	IM0
35	SDD
36	GND
37	LEDB
38	LEDA
39	LEDA
40	LED3A
41	VUNC
42	VUNC
43	VUNC
44	VUNC
45	GND

NOTES:

1. DISPLAY TYPE: 2.0" TFT_LCD / TRANSMISSIVE
2. OPERATING TEMPERATURE: -20°C ~ 70°C
3. STORAGE TEMPERATURE: -30°C ~ 80°C
4. VIEWING ANGLE: 12:00
5. BACKLIGHT BRIGHTNESS: 230CD/M2
6. DRIVER: ST7775R
7. RESOLUTION: 176(RGB)X220
8. CONNECTOR: FPC
9. UNMARK TOLERANCES: ±0.03MM

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL: ALL UNITS: 0.30 MM	DATE:	MODEL NUMBER: MLT020B45-3	PROJECTION	SHEET: 1 OF 1
DWN:				
CHK:				
APP:				

特殊工艺: