


2. Outline Drawing


ALL PAGES OF THIS VERSION APPROVED	
SIGNATURE:	DATE:

PIN ASSIGNMENT:

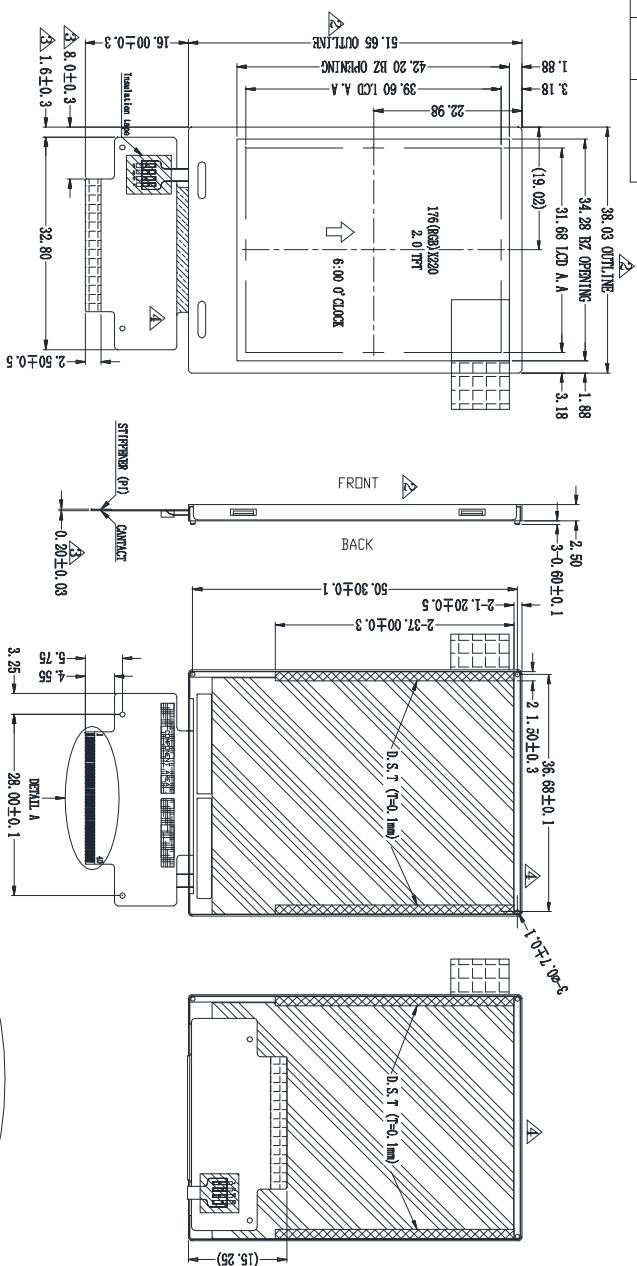

NOTES:

- | | |
|---------------------------|---------------------------|
| 1. DISPLAY TYPE: | 2.0" TFT_LCD/TRANSMISSIVE |
| 2. OPERATING TEMPERATURE: | -20°C~70°C |
| 3. STORAGE TEMPERATURE: | -30°C~80°C |
| 4. VIEWING ANGLE: | 6:00 |
| 5. BACKLIGHT BRIGHTNESS: | 300CD/M2 |
| 6. DRIVER: | ILI9325G |
| 7. RESOLUTION: | 176(RGB)X220 |
| 8. CONNECTOR: | PPC |
| 9. UNMARK TOLERANCES: | ±0.2MM |

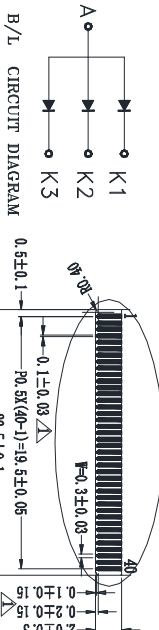

No.	PN	Name
1	DB5	
2	DB4	
3	DB3	
4	DB2	
5	DB1	
6	DB0	
7	DB9	
8	DB8	
9	GND	
10	DB7	
11	DB6	
12	DB5	
13	DB4	
14	DB3	
15	DB2	
16	DB1	
17	DB0	
18	DDCC	
19	VCC	
20	R/D	
21	/M/R	
22	RS	
23	/CS	
24	/RESET	
25	/MD	
26	GND	
27	A	
28	K1	
29	K2	
30	K3	
31	NC	
32	NC	
33	NC	
34	NC	
35	NC	
36	NC	
37	NC	
38	NC	
39	NC	
40	NC	

特殊工艺:

GENERAL TOTAL UNITS	DATE	MODEL NUMBER :		SHEET : 1 OF 1
0.30 MM		MLT020B33-1		
DWM:				
CHK:				
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION	DATE: