ALL PAGES OF THIS VERSION APPROVED			
SIGNATURE:		DATE:	

REV.	Description	Date
01	New released	2022-9-22

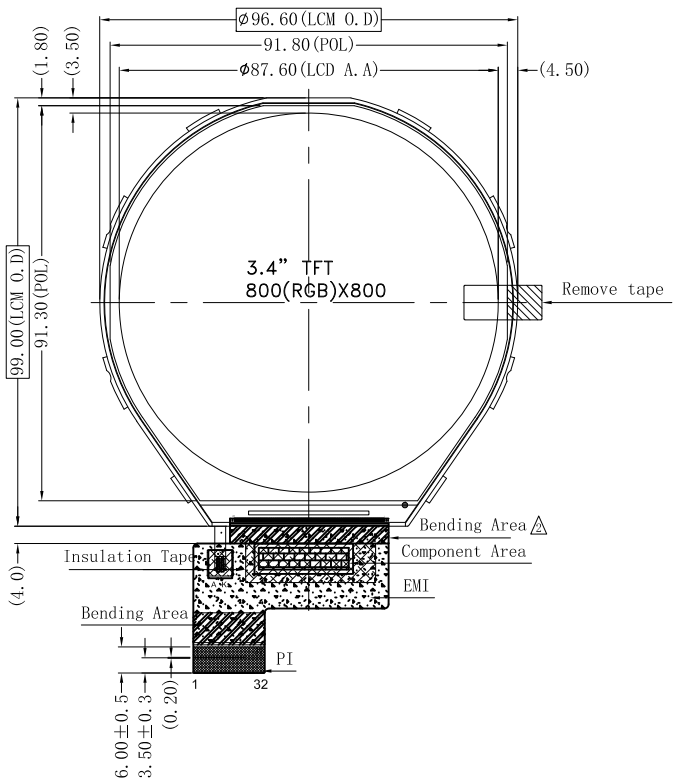

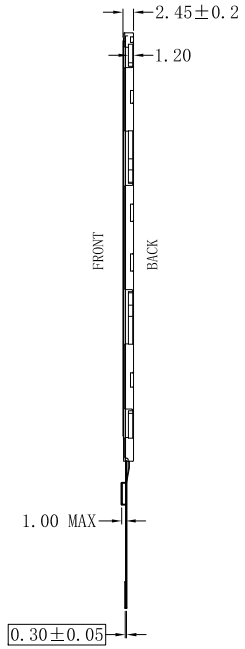

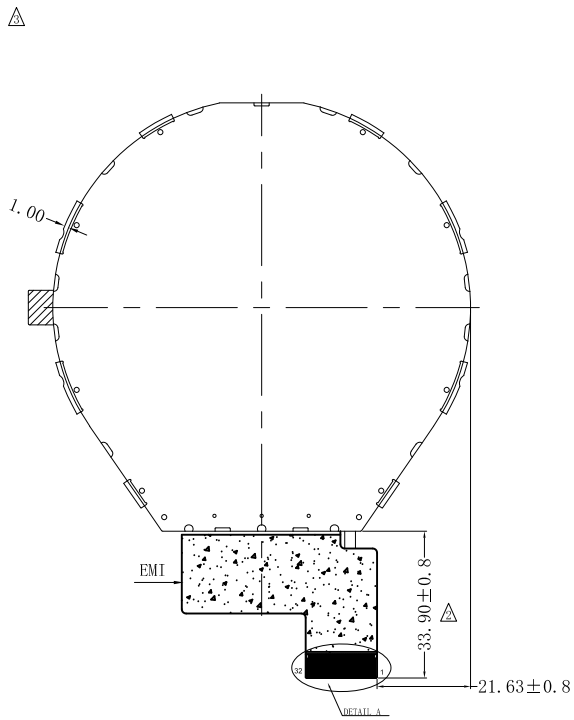

No.	Symbol
1	GND
2	LEDA
3	LEDA
4	LEDK
5	LEDK
6	GND
7	VDD(-5V)
8	VDD(-5V)
9	GND
10	VDD(+5V)
11	VDD(+5V)
12	GND
13	IOVCC(1.8V)
14	IOVCC(1.8V)
15	GND
16	RESET
17	GND
18	TE
19	GND
20	GND
21	LAN1_P
22	NC
23	LAN1_N
24	GND
25	CLK_P
26	NC
27	CLK_N
28	GND
29	LAN0_P
30	NC
31	LAN0_N
32	GND



DOTS DETAIL

LED CIRCUIT:



(If=40mA / Vf=12±1.2V)

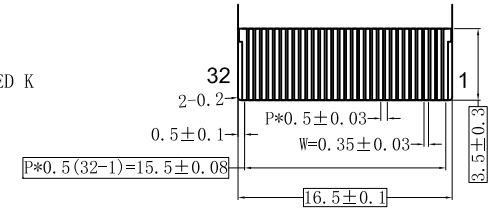

DETAIL A (3:1)

NOTES:

1. DISPLAY TYPE: 3.4"TFT_LCD/TRANSMISSIVE
2. OPERATING TEMPERATURE: -20°C~70°C
3. STORAGE TEMPERATURE: -30°C~80°C
4. VIEWING ANGLE: ALL
5. BACKLIGHT BRIGHTNESS: 360CD/M2
6. DRIVER: ILI9881C
7. RESOLUTION: 800(RGB)X800
8. CONNECTOR: FH19SC-32S-0.5SH
9. UNMARK TOLERANCES: ±0.2MM

特殊工艺：

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL 0.30	ALL UNITS: MM	DATE	MODEL NUMBER : MLT034S32-2		SHEET: 1 OF 1
DWN:					
CHK:					DATE:
APP:			DO NOT SCALE THIS DRAWING.	PROJECTION	